

CG71 Contact Treatment Grease

CG71 is particularly applicable for the protection and cleaning of static and moving electrical arc interfaces. It has been specially developed to give a consistently low mV drop throughout the lifetime of the contact/switch. It also provides exceptional oxidation stability and high temperature silver and copper corrosion protection.

CG71 gives exceptionally low wear characteristics and has excellent low temperature performance. This makes it an ideal lubricant for high quality automotive and audio applications. The compatibility of this grease with most grades of plastic is good, although a plastic testing is always advisable prior to full scale production.

- Excellent electrical performance; produces very low and constant mV drop and contact resistance
- Wide operating temperature range; ideal lubricant for high quality automotive and audio applications
- Enhances quality of switch or contact; provides smooth operation and extends switch lifetime
- Provides optimal mechanical resistance and reduces electrical background noise

Approvals

RoHS-2 Compliant (2011/65/EU):

Yes

Typical Properties

Colour	Cream
Density (g/ml)	0.85
Temperature Range (°C)	-50 to +130
Evaporation Weight Loss (% 7 days @ 100°C)	0.1
Evaporation Weight Loss (% 7 days @ 125°C)	1.85
Copper Strip Corrosion (IP154 / ISO 2160)	≤1b
Drop Point (IP32 / ISO 2176 (°C))	200
Cone Penetration Un-Worked (ASTM D 217 @ 20°C)	300
Cone Penetration Un-Worked (ASTM D 217 @ -40°C)	220
Cone Penetration Worked (ASTM D217, 60 strokes @ 20°C)	310
Consistency (NLGI)	1
Fliessdruck (Flow Pressure) (DIN 51805, mbar @ -40°C)	300
Oil Bleed / Separation (IP121)	5%
Silver Corrosion (DIN 51759, 3hrs @100°C)	No change
Plastic Compatibility - ABS	Test
Plastic Compatibility - PC	Test
Thickener	Lithium Complex Soap
UV Trace	Yes

Copyright Electrolube 2013

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.

Ashby Park, Coalfield Way,
Ashby de la Zouch,
Leicestershire LE65 1JR

T +44 (0)1530 419 600

F +44 (0)1530 416 640

BS EN ISO 9001:2008
Certificate No. FM 32082

Base Oil Properties

Base Oil Type	PAO / Complex Ester
Pour Point (ASTM D 97 (°C))	-70
Flash Point (COC ASTM D 92 (°C))	220

<u>Packing</u>	<u>Order Code</u>	<u>Shelf Life</u>	<u>Container Dimension</u>
35ml Syringe	ECG7135SL	48 months	
800g Bulk	ECG71800G	72 months	114mm (Diameter) x 120mm (Height)
20 Kg Bulk	ECG7125L	72 months	305mm (Diameter) x 406mm (Height)

Directions for Use

Before final treatment with Electrolube lubricants, contact surfaces should be clean and dry. For general removal of dirt, Electrolube Ultrasolve is recommended. Hardened dirt and tarnish, especially on larger contacts, should be removed by rubbing with an abrasive material, which can be impregnated with the lubricant to be used.

After cleaning non-wiping contacts, loosened tarnish should be removed before a final application of lubricant is made. Electrolube Contact Cleaning Strips (CCS) are recommended for this purpose. With wiping contacts, loosened tarnish will be pushed aside. This can be removed if desired, but is usually not necessary, due to the excellent lubricating and protective properties of the contact lubricant.

CG71 can be applied by one of the following methods (although this list is not exhaustive):

Manually by way of a syringe

Semi-automated using syringe dispensing equipment


Fully automated by way of a follower/pusher plate with dispensing system.

Typical Product Applications

The unique properties of CG71 have been produced by using a blend of low viscosity base oils, containing anti-corrosion, anti-oxidant and metal protection additives, thickened with a complex soap. The use of a complex soap thickener, rather than clay or silica, has the benefit of producing smoother grease with superior mechanical properties. These include decreasing wear and producing a high quality switch "feel". In addition if the switch is exposed to extremely high temperatures over long periods, forcing the base oil to evaporate, the thickener will not remain as an insulative, abrasive layer on the contact surfaces.

CG71 is an ideal lubricant for high quality automotive and audio applications where low contact resistance is required

Revision 1: Oct 2013

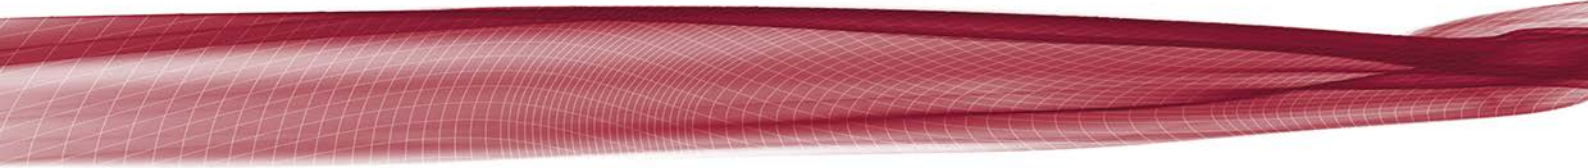

Copyright Electrolube 2013

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.

Ashby Park, Coalfield Way,
Ashby de la Zouch,
Leicestershire LE65 1JR

T +44 (0)1530 419 600

F +44 (0)1530 416 640

BS EN ISO 9001:2008
Certificate No. FM 32082