




THERMAL PAD - UDT10

Features

- Thermal conductivity: 1 W/mK
- High conformability
- Cost effective solution
- Electrically insulating
- Fiberglass reinforcement
- Soft and naturally sticky
- High dielectric breakdown of up to 6.0 kV/mm
- Custom die-cut parts: custom configurations available

Applications

- Between electronic components: semiconductors, ICs, CPUs, MOS and heatsink
- LEDs, LCD TV, telecom devices, wireless hubs, PCs, power supplies etc.
- Cooling and thermal modules
- In all applications where a metal housing is used as heatsink.

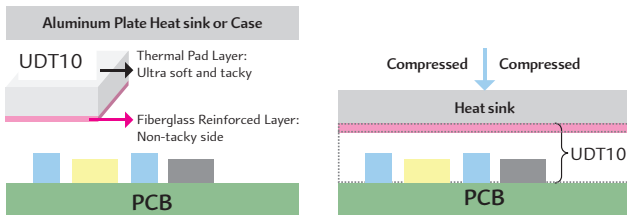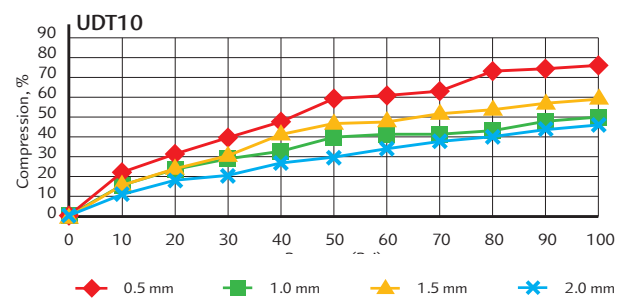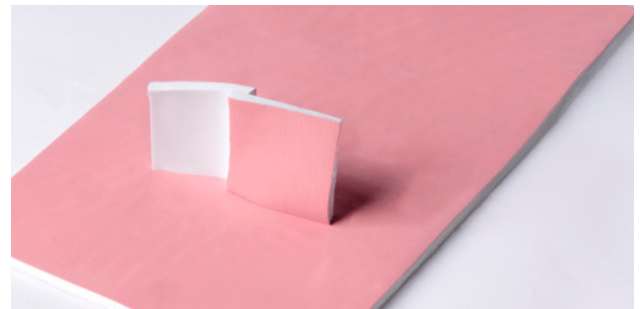

Part number code (example):

UDT 10/H10 - T10

- Thickness: 1.0 mm
- Hardness: 10 Shore C
- Thermal Conductivity: 1.0 W/mK
- UDT: Thermal Pad

TECNITE UDT10

Properties	Unit	UDT10	Test Method
Composition		Silicone & fiberglass	
Colour		Pink & white	
Thickness range	mm	0.5 -12	
Hardness	Shore C	10	ASTM D2240
Density	g/ml	2	ASTM D792
Elongation	%	60	ASTM D412
Temperature range	°C	-40 to 150	EN344
Breakdown voltage	kV/mm	≥6.0	ASTM D149
Volume impedance	ohm*cm	6.2*10 ¹⁵	ASTM D257
Dielectric constant	@ 1 MHz	5.27	ASTM D150
Weight dampify	%	≥1	@ 150 °C 240H
Thermal conductivity	W/mK	1	ASTM E1461
Thermal Resistance @ 40 psi	C-in ² /W	1.267 @ 0.5 mm 1.907 @ 1.0 mm	
Compliances		UL 94 V-0, RoHS, REACH	
Sheet sizes		Standard: 200*400 mm	
Custom configurations		Custom die-cut parts available. Available with acrylic PSA tape for improved application on one or both sides: • 3M Double Coated Tape 9448HK (will make the pad 0.15 mm thicker on both sides) • 3M Transfer Tape 3M467 (will make the pad 0.06 mm thicker on both sides)	

DISTRIBUTORS GROUP EUROPE

Handelsweg 6, NL - 2404 CD Alphen aan den Rijn, The Netherlands
 Tel. 0031-172-436361 Fax 0031-172-420310
 info@dge-europe.com www.dge-europe.com

