



Körapur 030

General Properties	Technology/Base	polyurethane
	Type of Product	adhesive and sealant
	Curing	moisture curing
	Mechanical Properties	elastic
	Parts	one part system
	Color	black, white, grey
	Product Benefits	high cold resistance high heat resistance excellent moisture resistance

Technical Data

General

Physical Properties		
Density	1.4 g/cm ³	Kö-test method 100031
Solid-content by weight	94%	
Glass Transition Temperature	-54 °C	DIN EN ISO 6721-1
Specific Volume Resistance	> 1 · 10 ¹⁰ Ω·cm	Kö-test method 100262
Processing Guidelines and Parameters		
Storage Temperature	5 °C to 25 °C	
Processing Temperature	5 °C to 35 °C	
Required Squeezing Pressure	2 bar to 5 bar	
Recommended Minimum Layer Thickness	2 mm	
Curing		
Skin Formation Time	45 min	Kö-test method 100109, Climate according to DIN 50 014
Curing to Depth	3 mm/d	within first 24 h; Climate according to DIN 50 014
Change in Volume	-6%	DIN EN ISO 10563
Cured Material Characteristics		
Shore Hardness (Type A)	45	DIN ISO 7619-1, after 28 d; thickness of specimen = 6 mm
Tensile Strength	2.9 MPa	DIN EN ISO 527
Elongation at Break	800%	DIN EN ISO 527
G ₁₀ -Modulus	0.8 MPa	DIN EN 1465
Lap Shear Strength	1.5 MPa	DIN EN 1465, substrates: aluminum/aluminum
Tear Strength	12 N/mm	ISO 34-1
Service Conditions		
Service Temperature	-60 °C to 90 °C	
Short-term temperature resistance	120 °C	30 min

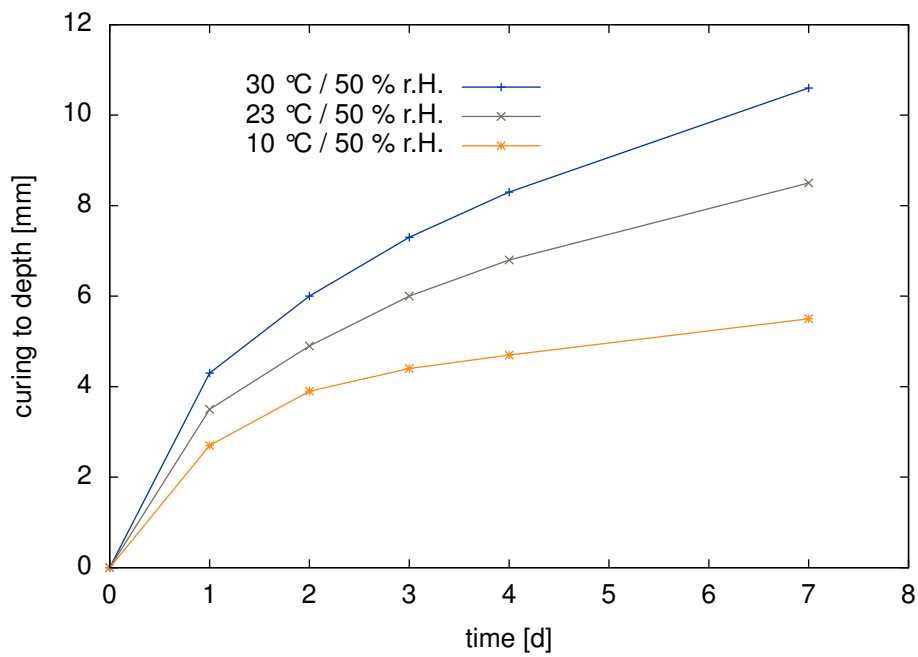


Figure 1: adhesives curing to depth in dependence of environmental conditions



Product Properties

Applications	Fields of Application	automotive construction industrial assembly transportation
Processing	Suitable Substrates	various galvanized steels various aluminum alloys various steel alloys duroplastics thermoplastics (except PE, PP, PTFE) various composite materials (e.g. CFRP, GFRP) glass mineralic materials wood coated surfaces
	Consistency	non-sagging pasty
	Surface Requirements	dry clean free of grease
	Surface Cleaning	Körasolv GL Körasolv PU Körasolv WL
	Adhesion Promoter (absorbing surface)	Körabond HG 74 E
	Adhesion Promoter (non absorbing surface)	Körabond HG 81
	Application Method	cartridge dispenser sachet dispenser dispensing system
	Product Overpaintability	after skin formation (depending on paint)
Cleaning	Cleaner for Tools	Körasolv GL Körasolv PU
Certifications	Certifications and Declarations of Conformity	CE marking no GHS labeling
Hints	Resistance against UV Radiation	Not suitable for glass bonding with permanent UV radiation to the bonding area. Please ask your local sales office for products suitable for such applications.
	Stress Cracking	Preliminary tests must be carried out on plastics with a tendency to stress cracking. (PMMA, ABS, PC or PS)
	Compatibility with Polystyrene Foams	Not suitable for bonding polystyrene foams. Please ask your local sales office for products suitable for such applications.
	Avoid Contact with Isocyanate Reactive Substances	Avoid direct contact with isocyanate reactive substances, especially alcohol such as spirit, dilutions, cleaning compounds and fission products of silane-modified polymers or silicones until the adhesive has attained full cure. This will prevent the adhesive from curing properly.



Additional Information

Storage

Körapur 030 should be used within the shelf life specified on the packaging. The storage stability only applies to material stored under appropriate conditions (original unopened containers, recommended storage temperature).

Safety

Please read our Material Safety Data Sheet (MSDS) and the labels of each product before use. The valid safety regulations must be considered.

Preparation

For some substrates the use of mechanical pre-treatment and/or cleaner or primer is necessary to achieve good adhesion. Refer to the product properties section of this data sheet for special surface requirements and suitable adhesion promoters.

Processing

Refer to the technical data table regarding processing parameters. Low temperatures can cause a temporary increase in viscosity resulting in reduced extrusion and slower curing rates.

Cleaning

Clean tools immediately after use. Once cured, the material can only be removed mechanically. Appropriate cleaners are listed in the product properties table. For further information please contact your local sales office.

Dimensioning

The required thickness of the adhesive layer depends on the expected maximum strength and joint movement. We recommend a minimum layer thickness of 2 mm.

Disposal

Please refer to the Material Safety Data Sheet (MSDS) for appropriate disposal instructions.

IMPORTANT: Information, specifications, procedures and recommendations provided (information) are based on our experience, and we believe this information to be accurate. No representation, guarantee or warranty is made as to the accuracy or completeness of the information or that use of the product will avoid losses or damages or give desired results. It is purchasers sole responsibility to test and determine the suitability of any product for the intended use. Tests should be repeated if materials or conditions change in any way. No employee, distributor or agent has any right to change these facts and offer a guarantee of performance.

NOTE TO USER: by ordering/receiving product, you accept the **H.B. Fuller General Terms and Conditions of Sale** applicable in the region. Please request a copy if you have not received this documentation. These Terms and Conditions contain disclaimers of implied warranties (including but not limited to disclaiming warranties of fitness for a particular purpose) and limits of liability. All other terms are rejected. In any event, (1) **the total aggregate liability of H.B. Fuller** for any claim or series of related claims, however arising, in contract, tort (including negligence), breach of statutory duty, misrepresentation, strict liability, or otherwise, **is limited to replacement of affected products or refund of the purchase price for affected products.** (2) H.B. Fuller **shall not be liable for loss of profit, loss of margin, loss of contract, loss of business, loss of goodwill, or any indirect or consequential losses** arising out of or in connection with product supply. (3) Nothing in any term shall operate to exclude or limit H.B. Fullers liability for fraud, gross negligence, death, or personal injury caused by negligence, or for breach of any mandatory implied terms unless permitted by law.

